

3' Nail Drag with Wheel Kit Product Manual



1700 Jasper St., Unit F, Aurora, CO 80011 T 800.624.6706 F 303.364.7796 • Newstripe.com
3' Nail Drag with Wheel Kit / 2626.0818

3' Nail Drag with Wheel Kit

Always wear safety goggles or protective eye wear when operating the unit!

TABLE OF CONTENTS

Wheel Kit Assembly Page 1
Nail Drag AssemblyPage 2-3
Warranty Page 4

Thank you and congratulations on your purchase of the 3' Nail Drag with Wheel Kit.

Please read over the instructions and make sure you understand operating procedures before using the unit.

3' Nail Drag with Wheel Kit

Always wear safety goggles or protective eye wear when operating the unit!


Before assembling, please check the shipping carton.

You should have:


| | |
|-------------------------------|----------|
| (2) Left Side Wheel Assembly | 10004545 |
| (2) Right Side Wheel Assembly | 10004546 |
| (8) 5/16-18 Lock Nut | 10000406 |
| (8) 5/16 Flat Washer | 10000095 |
| (8) 5/16-18x1 1/2 bolt | 10002600 |
| (4) Lynch Pins | 10003211 |
| Replacement Wheel | 10000753 |
| (Not Included) | |

**Tools required for assembly
(Not included)**

(2) 6" adjustable wrenches or 1/2" wrenches.

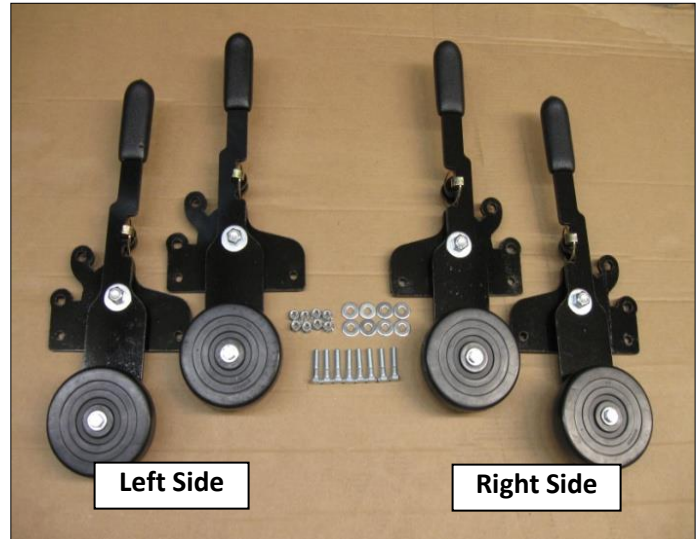

ASSEMBLY

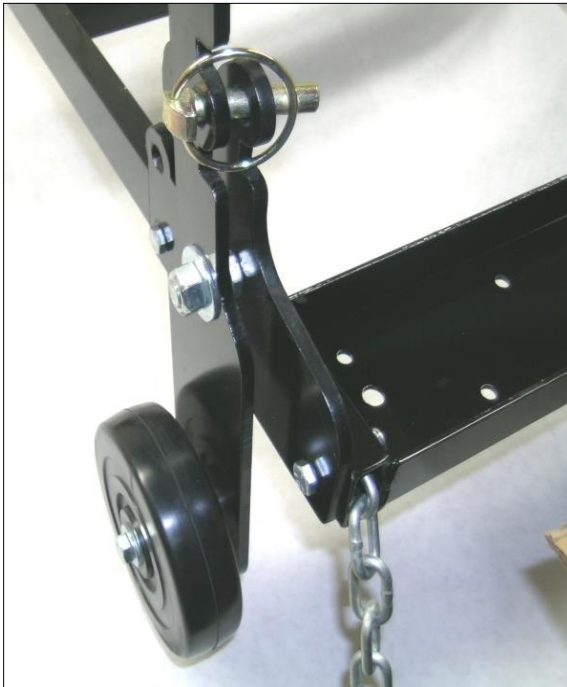

If the nail drag is not assembled, the wheel kit must be installed first.

- If the nail drag has been assembled, the front and rear retainer plates and upper clam shells must be removed to install the wheel kit.
- Mount wash wheel assembly to the two holes, front and rear, on each side of the nail drag. Use the 5/16" bolts, washers, and nuts provided with the kit. The nuts and washers must go to the inside of the frame. When properly installed the handles should rotate forward so that the wheels trail behind.

IMPORTANT NOTE: If the nail drag has not been previously assembled, refer to step 1: Attaching chain in the nail drag assembly instructions. You must combine step 1: Attaching chain with the installation of the wheel kit.

To adjust wheel height, open ring on lynch pin and remove pin. Move to desired location and reinstall pin and close ring.

1700 Jasper St., Unit F, Aurora, CO 80011 T 800.624.6706 F 303.364.7796 • Newstripe.com

3' Nail Drag with Wheel Kit / 2626.0818

3' Nail Drag with Wheel Kit


Always wear safety goggles or protective eye wear when operating the unit!

| Item # | Qty | Description | Part# |
|--------|-----|-----------------------|----------|
| 1 | 3 | Retainer plate | 10002089 |
| 2 | 1 | Lower frame section | 10002087 |
| 1 | 3 | 10' 3/16" proof chain | 10002091 |
| 4 | 51 | Special drag nail | 10002150 |
| 5 | 12 | 3/8-16 x 2-2 1/2 bolt | 10002077 |
| 6 | 2 | 5/16-18 x 1-1/2 bolt | 10002600 |
| 7 | 2 | 5/16-18 lock nut | 10000406 |
| 8 | 12 | 3/8-16 lock nut | 10000869 |
| 9 | 24 | 3/8 flat washer | 10002126 |
| 10 | 3 | Upper clam shell | 10002088 |
| 11 | 1 | Assembly instructions | 10002096 |



Tools required for assembly.
{Assembly by two people recommended}

1/2" combo wrench
9/16" combo wrench
6" adjustable wrench

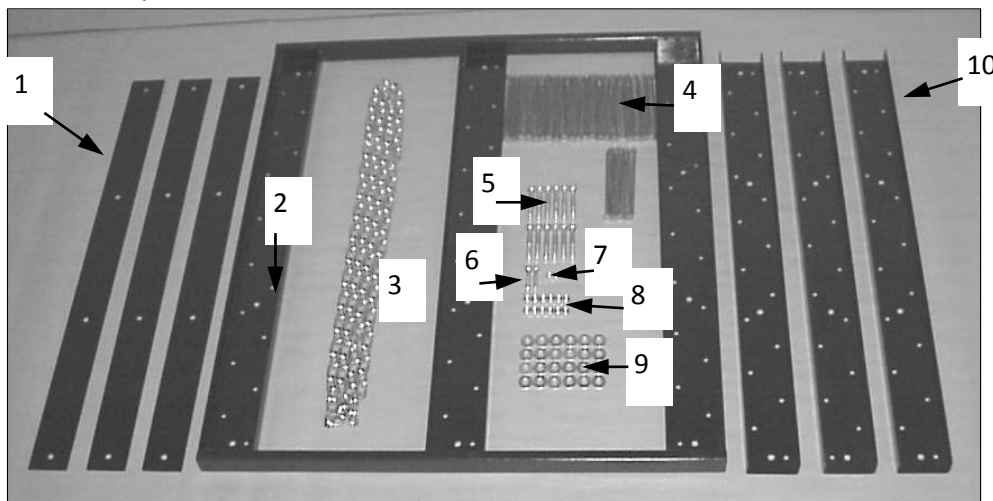

Read all instructions before assembling. The wheel kit needs to be installed at this time. See wheel kit instructions on page 1.

STEP1: Attaching the Chain

- Lay the lower frame section (1) open side up on flat surface.
- Insert the end link of 3/16" proof chain (10) into end of tubing on Lower frame section (1). Insert 5/16 -24 x 1 1/2 bolt (6) through outside wall of tubing, through end of link and inside wall of tubing.
- Attach 5/16-24 Lock nut (7) to bolt and tighten snugly.
- Repeat steps B & C on opposite side.
- Assembly should look like the second illustration.



1700 Jasper St., Unit F, Aurora, CO 80011 T 800.624.6706 F 303.364.7796 • Newstripe.com


3' Nail Drag with Wheel Kit / 2626.0818

3' Nail Drag with Wheel Kit

Always wear safety goggles or protective eye wear when operating the unit!

Step 2: Installing the upper clam shell.


A. Place upper clam shell (3) open side down into lower frame section (1). Make certain holes in upper clam shell align with hole in lower frame section.

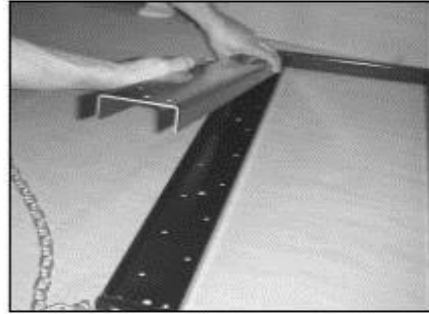

Step 3: Installing the drag nails:

A. Lift end of lower frame section (1) to a vertical position.

B. Insert 25 drag nails (9) through holes in upper clam shell (3), then through holes in lower frame section. NOTE: nails may need to be tapped into place with hammer.

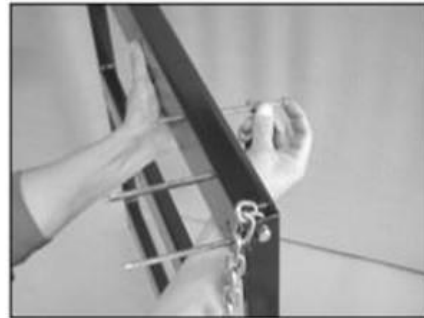


Step 4: Installing the retainer plate.



A. Insert 3/8-16 x 2 1/2 bolt (4) through 3/8 flat washer (8) then through holes in retainer plate (3), Upper clamshell (2) and lower frame section (1).

B. Place a 3/8 flat washer (8) and 3/8-16 lock nut (5) on the bolt and tighten firmly.

C. Repeat steps A & B on remaining three holes.

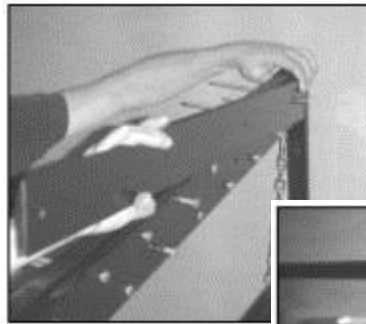


Top view

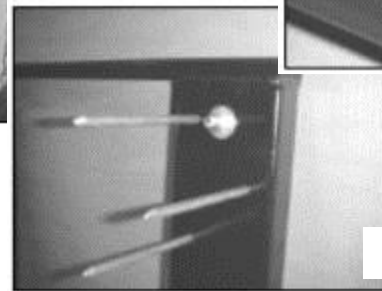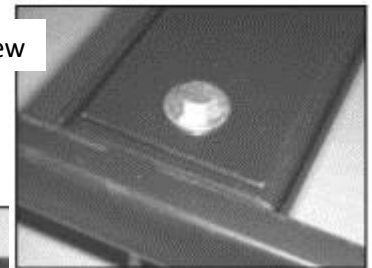

Bottom view

Step 5: Repeat steps 2 - 4 for remaining cross member.

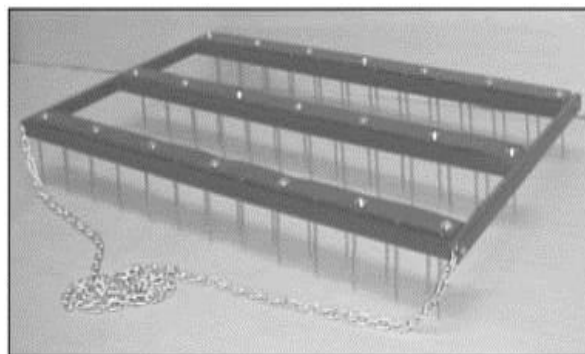

COMPLETED ASSEMBLY

1700 Jasper St., Unit F, Aurora, CO 80011 T 800.624.6706 F 303.364.7796 • Newstripe.com

3' Nail Drag with Wheel Kit / 2626.0818

3' Nail Drag with Wheel Kit

Always wear safety goggles or protective eye wear when operating the unit!

THE NEWSTRIPE 18 MONTH LIMITED WARRANTY

NEWSTRIPE, INC., WARRANTS TO THE ORIGINAL PURCHASER, FOR 18 (EIGHTEEN) MONTHS AFTER DATE OF PURCHASE, THAT THE EQUIPMENT* HEREBY SOLD SHALL BE FREE OF DEFECTS IN MATERIALS AND WORKMANSHIP. THIS WARRANTY DOES NOT EXTEND TO ANY DAMAGE OR MALFUNCTION RESULTING FROM MISUSE, NEGLIGENCE, ACCIDENT, IMPROPER OPERATION, OR NORMAL WEAR AND TEAR.

Damage incurred in shipment from Newstripe, Inc. to the customer is the total responsibility of the carrier. The CUSTOMER MUST NOTE DAMAGES on the Bill of Lading of Trucking Company or Railroad; and Newstripe, Inc. will furnish to the customer the cost or parts and labor. The customer can then bill the common carrier for the damages by placing his signature on the documents.

The Newstripe, Inc. obligation under this warranty and any implied warranties is limited to replacement or repair of defective parts of its manufacture without charge for 18 (Eighteen) months from date of purchase. For service under this warranty, buyer shall ship the defective part or parts of the equipment, transportation prepaid, to Newstripe, Inc. together with a written description of any claimed defect and proof of purchase date of the materials being returned. Prior to retuning any part or machine, the CUSTOMER must obtain a Return Materials Authorization number. Call 1-800-624-6706. To review the complete guidelines for warranty and returns, please visit www.newstripe.com/guidlinesforwarrantyandreturn.

*Gasoline engines, compressors, pumps (including airless) and Transaxles are furnished with their respective manufacturer's warranties only. Such components are not covered by any warranty of Newstripe, Inc. Where Newstripe elects to extend manufacturers' warranties, the warranty shall be prorated as to cover 100% of the cost to replace or repair materials and parts for the first 12 months of ownership and 60% for the remaining 6 month period.

The responsibilities described above are the only responsibilities of Newstripe, Inc. under this written warranty or any implied warranty, and may be exercised only within 18 (Eighteen) months from the date of purchase. In no event shall Newstripe, Inc. be liable for incidental or consequential damages and no person had any authority to bind it to any representation or warranty, not be responsible for work done, materials furnished or repairs made by others without its' specific written authorization.

THIS WARRANTY SHALL BE IN LIEU OF ANY AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND THERE IS NO OTHER REPRESENTATION OR WARRANTY OF ANY KIND WITH RESPECT TO THE GOODS SOLD HEREBY EXCEPT AS SET FORTH HEREIN. IT IS EXPRESSLY AGREED THAT THIS WARRANTY SHALL BE LIMITED TO THE ADJUSTMENT, REPAIR OR REPLACEMENT OF PARTS AND THE LABOR AND SERVICES REQUIRED THEREBY. IN NO EVENT, INCLUDING ANY CLAIM FOR NEGLIGENCE, SHALL NEWSTRIPE, INC. BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Sincerely,
Newstripe, Inc

1700 Jasper St., Unit F, Aurora, CO 80011 T 800.624.6706 F 303.364.7796 • Newstripe.com

3' Nail Drag with Wheel Kit / 2626.0818