



Product Manual

BigSqueeze™ Floor Stand

10001623



Proudly Made in the USA
Newstripe.com • 303-364-7786

BigSqueeze™ Floor Stand

TABLE OF CONTENTS

Precautionary Warnings..... Page 1

Assembly..... Page 2

Mounting the BigSqueeze Page 3

Warranty..... Page 4

**Thank you for purchasing the Floor Stand
for your Newstripe BigSqueeze™ Paint
Can & Pail Crusher.**

Please read over all the instructions
before using the Floor Stand.



BigSqueeze™ Floor Stand



PRECAUTIONARY WARNINGS

- **PLEASE** read and understand all assembly instructions as detailed in this manual. Failure to follow specified instructions may result in equipment damage or severe injury to personnel.
- **ALWAYS** securely anchor the floor stand to the facility floor for added safety.
- **ALWAYS** consult your Facility Safety and/or Personnel Department for specified safety protocols prior to operating this equipment.

The BigSqueeze Floor Stand allows you to set your BigSqueeze Paint Can & Pail Crusher on the floor with room underneath for a 30-gallon drum or other suitable container for capturing fluids. This accessory also allows you to bolt your BigSqueeze to the floor for added safety.

Your Floor Stand Box Includes:

Qty. 10, $\frac{5}{16}$ -18 x $1\frac{3}{4}$ " Long Bolts

Qty. 4, $\frac{5}{16}$ -18 x $1\frac{1}{4}$ " Long Bolts

Qty. 8, $\frac{5}{16}$ -18 x 1" Long Bolts


Qty. 44, $\frac{5}{16}$ Flat Washers

Qty. 22, $\frac{5}{16}$ -18 Nylock Hex Nuts

BigSqueeze™ Floor Stand

ASSEMBLY

1. Remove all contents from the box and then set the right and left feet on the floor with the brackets to the outside.
2. Install the bottom square tube brace on the back side of the brackets, between the feet with two 1¾" bolts, four flat washers, and two nylock hex nuts.

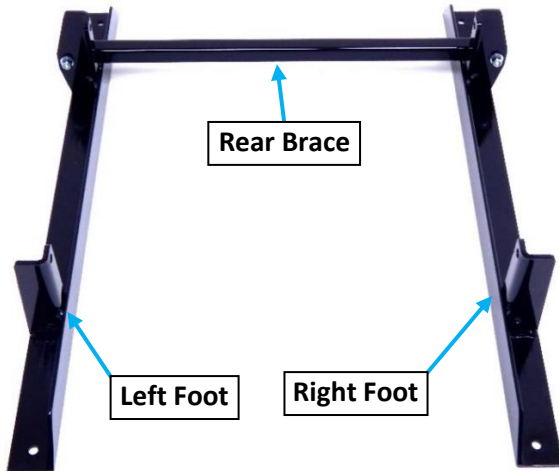

3. Install the four support legs on the bracket of the feet with eight 1¼" Bolts, sixteen flat washers, and eight nylock hex nuts.

Note: When installed, the tabs on the support legs will be at the top, facing outward.



4. Install the left and right upper support rails on the outside of the support leg tabs using four 1" bolts with eight flat washers, and four nylock hex nuts. Install the rails so that the flanges that the BigSqueeze sit on are to the inside, and the slotted hole on the top of each rail is to the rear.

Note: Do not fully tighten the rail bolts. This will aid in hole alignment with the top braces.



5. Install the front and rear top braces with four 1¼" bolts, eight flat washers, and four nylock hex nuts. Tighten all bolts.

Note: Always securely anchor the floor stand to the facility floor for added safety.



BigSqueeze™ Floor Stand

MOUNTING THE BIGSQUEEZE ON THE FLOOR STAND

1. Before installing the BigSqueeze on the floor stand, remove the drain hose from the bottom of the unit.
2. Carefully set your BigSqueeze on the rails of the floor stand and then secure it with four 1" bolts, eight flat washers, and four nylock hex nuts.

Note: You may slightly loosen the rail bolts if needed, to aid in hole alignment. Re-tighten the bolts after the BigSqueeze is secured.

3. Re-install the BigSqueeze drain hose (not shown) and place a suitable container below it to catch expelled fluids.



BigSqueeze™ Floor Stand

10001655

18 Month Warranty

Newstripe, Inc. ("Newstripe") warrants to the original purchaser, for 18 (Eighteen) Months after date of purchase, that the equipment* hereby sold shall be free of defects in materials and workmanship. This warranty does not extend to any damage or malfunction resulting in misuse, neglect, accident, improper operation, or normal wear and tear.

* Gasoline engines, compressors, low pressure pumps, and transaxles are furnished with their respective manufacturers' warranties only and are not covered by any warranty of Newstripe. High pressure pumps manufactured by Newstripe (excluding wear items like diaphragms and valves) are warranted for materials and workmanship for 12 Months after the date of purchase.

Damage incurred in shipment from Newstripe to the purchaser is the total responsibility of the shipping carrier. The purchaser is responsible for noting any damages on the Bill of Lading of the shipping carrier and Newstripe will work with the shipping carrier to resolve any damages incurred.

The Newstripe obligation under this warranty and any implied warranties is limited to replacement or repair of defective parts of its manufacture without charge for 18 (Eighteen) Months from date of purchase. For service under this warranty, the purchaser shall obtain an approved Return Materials Authorization (RMA) from Newstripe and then ship the defective part or parts of the equipment, transportation prepaid by the purchaser, to Newstripe together with a written description of any claimed defect and proof of purchase date of the materials being returned. To review Newstripe's complete guidelines for warranty claims and returns, please visit our website at www.newstripe.com.

The responsibilities described above are the only responsibilities of Newstripe under this written warranty or any implied warranty and may be exercised only within 18 (Eighteen) Months from the date of original purchase. In no event shall Newstripe be liable for incidental or consequential damages and no person has any authority to bind it to any representation or warranty. Newstripe is not responsible for work done, materials furnished, or repairs made by others without its specific written authorization.

This warranty shall be in lieu of any and all other warranties, expressed or implied, including any warranties of merchantability or fitness for a particular purpose, and there is no other representation or warranty of any kind with respect to the goods sold hereby except as set forth herein. It is expressly agreed that this warranty shall be limited to the adjustment, repair or replacement of parts and the labor and services required thereby. In no event, including any claim of negligence, shall Newstripe be liable for incidental or consequential damages.



Newstripe.com / 303-364-7786