



Product Manual

DragKing™ Deluxe Infield Drag & Scarifier

10001592



Proudly Made in the USA
Newstripe.com • 303-364-7786

DragKing™ Deluxe Infield Drag & Scarifier

TABLE OF CONTENTS

Assembly	Page 1	Thank you for purchasing the Newstripe DragKing™ Deluxe Infield Drag & Scarifier.
Operation	Page 2	Please read over the instructions and make sure you understand the operating procedures before using the unit.
Towing.....	Page 2	
Parts List.....	Page 3	This manual is for units manufactured in 2025 and later. For units manufactured before 2025, please contact Newstripe for the appropriate manual.
Warranty	Page 4	



PRECAUTIONARY WARNINGS

- **PLEASE** read and understand all operating instructions as detailed in this manual. Failure to follow specified instructions may result in equipment damage or severe injury to personnel.
- **DO NOT** exceed 5 mph when grooming with the DragKing Deluxe.
- **DO NOT** exceed 5 mph when towing the DragKing Deluxe.
- **ALWAYS** wear gloves when handling the DragKing Deluxe. The process of grooming soil may produce sharp edges resulting in injury to personnel.
- **ALWAYS** consult your Facility Safety and/or Personnel Department for specified safety protocols prior to operating this equipment.

DragKing™ Deluxe Infield Drag & Scarifier

Your package contains the following:

In Box

- Scarifier Section Assembly
- Drag Section Assembly
- Debris Basket Section
- Parts Bag
- Product Manual

In Parts Bag


- (6) ¼" Quick Link Connectors
- (1) 8' Chain
- (1) ¼" Anchor Shackle

ASSEMBLY

1. Place the scarifier section on the ground with the blades down and the wheels up. Install the anchor shackle in the middle link of the chain and then use two of the quick link connectors to attach the ends of the chain to the two holes in the front of the scarifier section.
2. Place the drag section on the ground behind the scarifier section with the blade toward the front. Connect the drag section to the scarifier section with two quick link connectors.

3. Place the debris basket section on the ground behind the drag section. Connect the debris basket to the drag section with the last two quick link connectors.

Note: Make sure that the nuts on all six quick link connectors are closed (turned full clockwise), before using the DragKing Deluxe. Failure to close the quick link connectors may result in equipment damage.

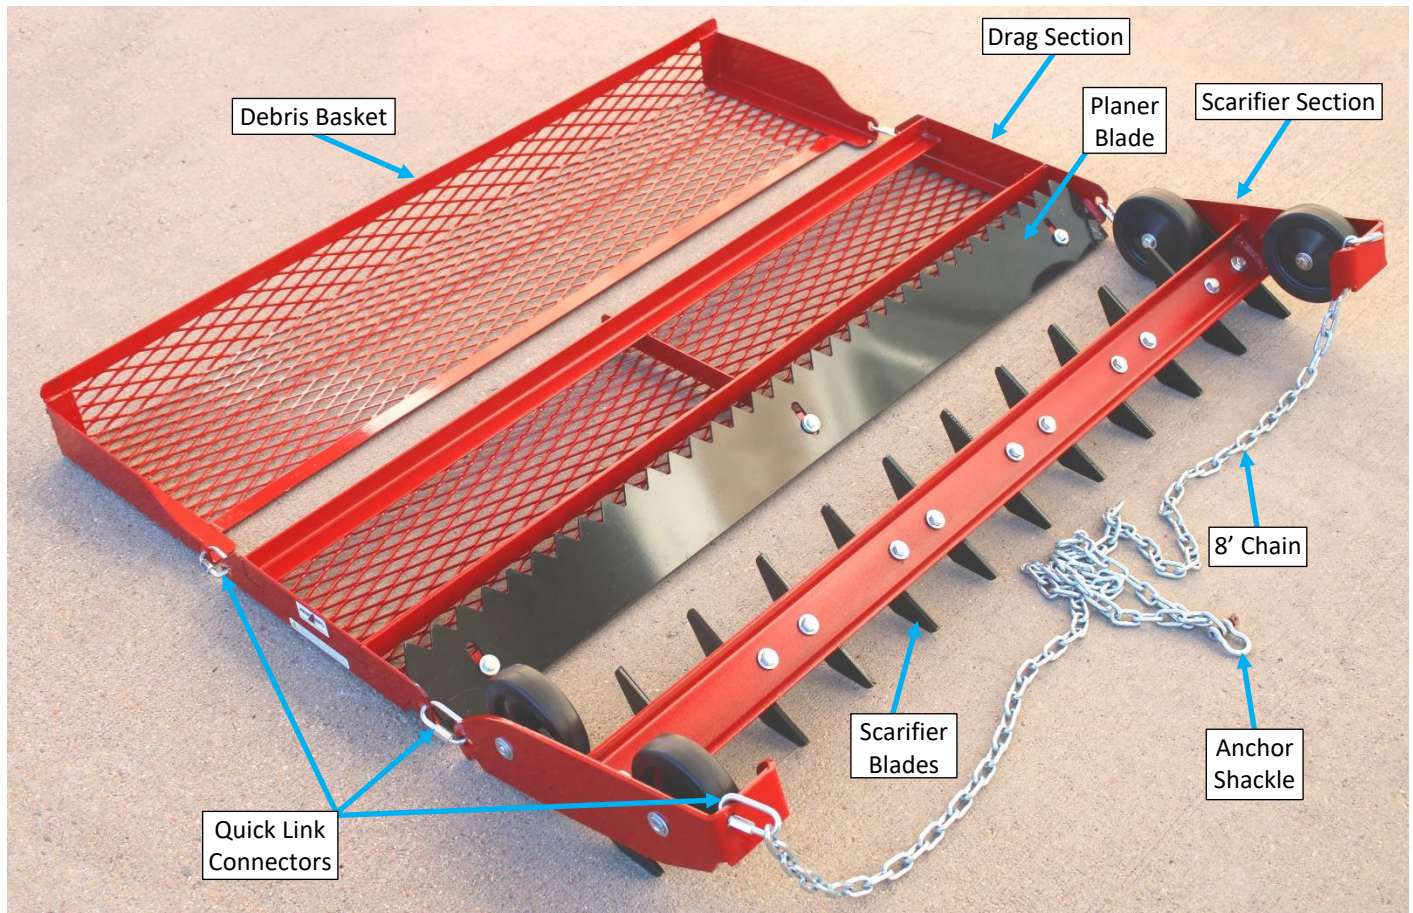

DragKing™ Deluxe Infield Drag & Scarifier

OPERATION

1. The blades on the scarifier section of the DragKing Deluxe may be adjusted up or down one hole to slightly change the depth of cut. You may also adjust them down one hole as the blades wear. When one side of the blades wear out, remove them from the scarifier section, rotate them 180 degrees, and re-attach them. This will give you a fresh cut without the need of immediate replacement.

Note: The anchor shackle in the middle of the chain is for hooking the DragKing Deluxe to a vehicle. (Maximum Operational Speed 5mph)

2. The DragKing Deluxe is shipped with the planer blade on the drag section in the up position. You may use a ½" wrench to loosen the bolts and lower the blade to make a deeper cut. Use the smooth side of the planer blade for leveling or remove the blade, turn it over, and re-attach it so that the serrated edge is down for added scarifying.

Note: You may also add concrete blocks or other ballast to the drag section rails of the DragKing when pulling it with a vehicle to aid in cutting the surface you are grooming.

TOWING

Using our Stow & Tow feature, the DragKing Deluxe may be towed short distances at low speed between fields, or to and from the maintenance or storage facility. (Maximum Towing Speed 5mph)

Note: ALWAYS wear gloves when handling the DragKing Deluxe. The process of grooming soil may produce sharp edges resulting in injury to personnel.

1. Disconnect the DragKing Deluxe from the tow vehicle. If there is any ballast on the drag section, remove it and place it in the back of the vehicle.
2. Grasp the rails of the DragKing Deluxe from one side, and then carefully turn it over so that it is upside down.
3. Grasp the back of the debris basket and then lift it and the drag section. Set the blade holder of the drag section in the notches in the back of the side plates of the scarifier section, with the planer blade in between the side plates.



4. Rotate the debris basket forward, forming a triangle with the sections of the DragKing Deluxe. Rest the top edge of the debris basket in the notches in the front of the scarifier section side plates.



5. You may now re-connect the DragKing Deluxe to the tow vehicle and slowly tow it a short distance as needed.




DragKing™ Deluxe Infield Drag & Scarifier

PARTS LIST

Item	Description	Part Number
1	8' Chain	10002091
2	Anchor Shackle	10001871
3	Quick Link Connector (6 Required)	10001561
4	Planer Blade	10003922
5	Drag Section	10002658

Item	Description	Part Number
6	Debris Basket	10002662
7	Scarifier Section	10003980
8	Scarifier Reversible Blade Set of 6	10003923
9	Wheel (4 Required)	10000753

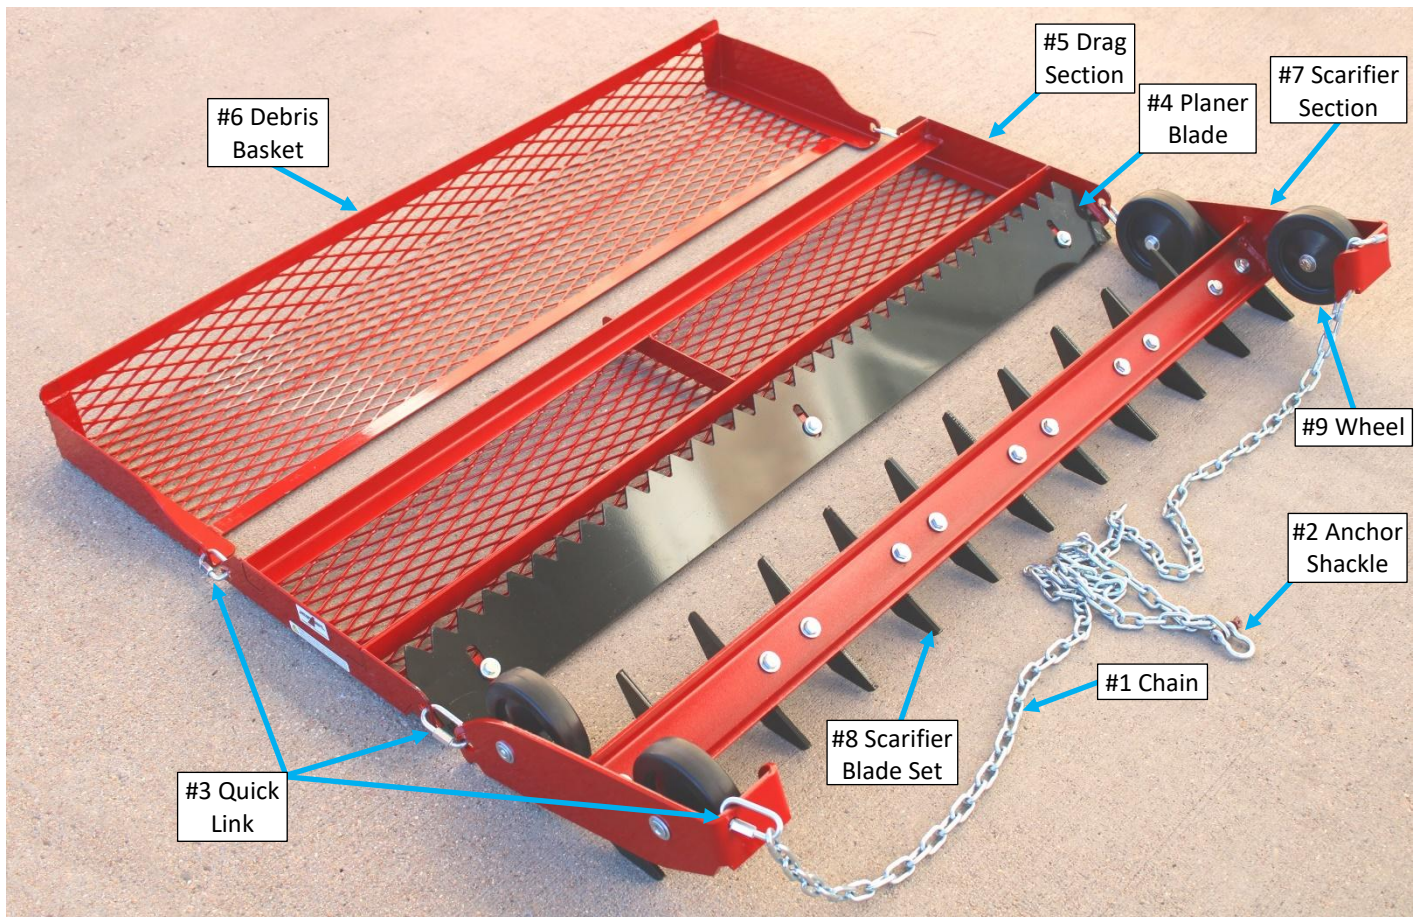

DragKing™ Deluxe Infield Drag & Scarifier

10001592

18 Month Warranty

Newstripe, Inc. ("Newstripe") warrants to the original purchaser, for 18 (Eighteen) Months after date of purchase, that the equipment* hereby sold shall be free of defects in materials and workmanship. This warranty does not extend to any damage or malfunction resulting in misuse, neglect, accident, improper operation, or normal wear and tear.

* Gasoline engines, compressors, low pressure pumps, and transaxles are furnished with their respective manufacturers' warranties only and are not covered by any warranty of Newstripe. High pressure pumps manufactured by Newstripe (excluding wear items like diaphragms and valves) are warranted for materials and workmanship for 12 Months after the date of purchase.

Damage incurred in shipment from Newstripe to the purchaser is the total responsibility of the shipping carrier. The purchaser is responsible for noting any damages on the Bill of Lading of the shipping carrier and Newstripe will work with the shipping carrier to resolve any damages incurred.

The Newstripe obligation under this warranty and any implied warranties is limited to replacement or repair of defective parts of its manufacture without charge for 18 (Eighteen) Months from date of purchase. For service under this warranty, the purchaser shall obtain an approved Return Materials Authorization (RMA) from Newstripe and then ship the defective part or parts of the equipment, transportation prepaid by the purchaser, to Newstripe together with a written description of any claimed defect and proof of purchase date of the materials being returned. To review Newstripe's complete guidelines for warranty claims and returns, please visit our website at www.newstripe.com.

The responsibilities described above are the only responsibilities of Newstripe under this written warranty or any implied warranty and may be exercised only within 18 (Eighteen) Months from the date of original purchase. In no event shall Newstripe be liable for incidental or consequential damages and no person has any authority to bind it to any representation or warranty. Newstripe is not responsible for work done, materials furnished, or repairs made by others without its specific written authorization.

This warranty shall be in lieu of any and all other warranties, expressed or implied, including any warranties of merchantability or fitness for a particular purpose, and there is no other representation or warranty of any kind with respect to the goods sold hereby except as set forth herein. It is expressly agreed that this warranty shall be limited to the adjustment, repair or replacement of parts and the labor and services required thereby. In no event, including any claim of negligence, shall Newstripe be liable for incidental or consequential damages.



Newstripe.com / 303-364-7786