



Product Manual

NewLiner™
25lb Dry Line Marker
10001300



Proudly Made in the USA
Newstripe.com • 303-364-7786

NewLiner™ 25lb Dry Line Marker

TABLE OF CONTENTS

Precautionary Warnings	Page 1
Assembly	Page 2
Operation	Page 3
Parts List.....	Page 3
Warranty.....	Page 4

**Thank you for purchasing the Newstripe
NewLiner™ 25lb Dry Line Marker.**

Please read over the instructions and
make sure you understand the operating
procedures before using the unit.



NewLiner™ 25lb Dry Line Marker



PRECAUTIONARY WARNINGS

- **PLEASE** read and understand all operation instructions as detailed in this manual. Failure to follow specified instructions may result in equipment damage or severe injury to personnel.
- **ALWAYS** make sure that the marking material is kept dry.
- **DO NOT** use marking material that has lumps, or that had become wet previously. Lumps in the material may damage the unit.
- **ALWAYS** rinse the bucket after each use and then allow it to air dry.
- **ALWAYS** consult your Facility Safety and/or Personnel Department for specified safety protocols prior to operating this equipment.

Your NewLiner™ 25lb Dry Line Marker package contains the following:

In Box

- Bucket Assembly
- Handle Assembly
- Lever & Control Rod Assembly
- Kickstand

In Parts Bag

- (2) ¼"-20 x 1" Long Bolts
- (2) ¼"-20 x ½" Long Bolts
- (4) ¼"-20 Star Washer Lock Nuts
- (3) ¼" Flat Washers
- (1) 5/64" x 1-1/2" Hairpin Clip
- (1) ¼"-20 x 1-3/4" Long Tap Bolt
- (1) Gate Indexer Plate
- (1) ¼"-20 Thin Jam Nut
- (1) Indexer Control Lever Spring
- (1) ¼"-20 Nylock Nut
- (2) 3/16" x 8" Black Zip Ties
- (1) Product Manual

NewLiner™ 25lb Dry Line Marker

ASSEMBLY

1. Attach the kickstand to the back of the bucket with two $\frac{1}{4}$ " x $\frac{1}{2}$ " long bolts from the inside, and two $\frac{1}{4}$ " flat washers and star washer lock nuts on the outside.
2. The handle assembly comes already attached to the top holes in the bucket. Rotate the handle assembly so that the lower holes of the handle line up with the lower holes in the bucket. Attach the handle to the bucket lower holes with two $\frac{1}{4}$ " x 1" long bolts and star washer lock nuts.




3. Loosen the wing knobs on the handle assembly and then unfold it and re-tighten the wing knobs.
4. Install the $\frac{1}{4}$ " x $1\frac{3}{4}$ " fully threaded tap bolt in the lever pivot hole in the left side of the handle from the inside out.
5. Install the indexer plate onto the fully threaded tap bolt, on the outside of the handle, and then secure it with the thin $\frac{1}{4}$ " jam nut.

6. Secure each end of the indexer plate to the handle by placing a black zip tie through each slot and then around the handle. Pull the zip ties tight and then trim off the ends.
7. Install the lever and control rod assembly onto the fully threaded bolt, followed by the indexer lever spring. Secure these parts with one $\frac{1}{4}$ " Nylock nut. Tighten the nut only far enough to compress the spring to give the desired tension to keep the end of the rod in the notches of the indexer plate.

Note: See the Lever Detail diagram below for steps 4 through 7.



LEVER DETAIL

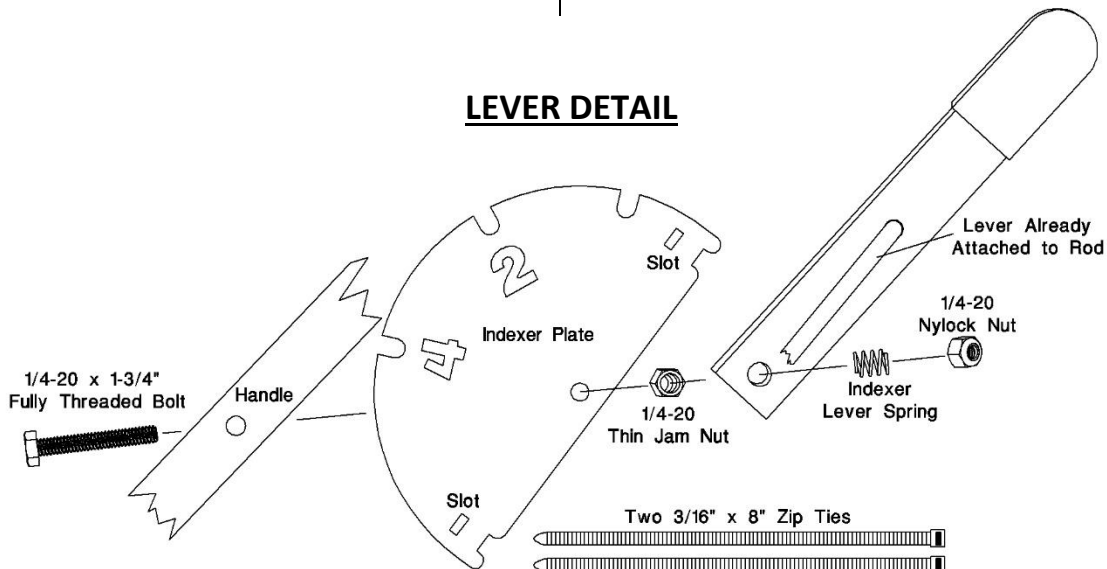

NewLiner™ 25lb Dry Line Marker


OPERATION

1. Move the powder gate lever to the OFF position (unmarked notch in the indexer plate).
2. Fill the NewLiner with any type of clean, dry, lump-free line marking material.
Note: Make sure to always keep the line marking material dry.
3. Position the NewLiner over the line to be marked.
4. Select the line width by moving the powder gate lever to either the 2" position or the 4" position as indicated by the numbers on the indexer plate.
5. Begin walking. The material will feed from the bottom of the bucket as you walk until the bucket is empty or the lever is moved to the OFF position.
6. Rinse the bucket after each use and then allow it to air dry.

PARTS LIST

Item	Description	Part Number
1	Control Rod Assembly	10001213
2	Control Lever	10001478
3	Indexer Control Lever Spring	10000705
4	Indexer Plate (With 2 Zip Ties)	10000763
5	Wheel (2 Required)	10001329
6	Drive Hub (Not Shown)	10000520
7	½" Push Nut (Wheel Retainer)	10001457

Item	Description	Part Number
8	Foam Hand Grip (2 Required)	10000967
9	Paddle	10001481
10	Wing Knob (2 Required)	10004899
11	Hairpin Clip	10002492
12	Axle Bushing	10001311
13	Handle Assembly (Complete)	10004925
14	Powder Gate	10001477

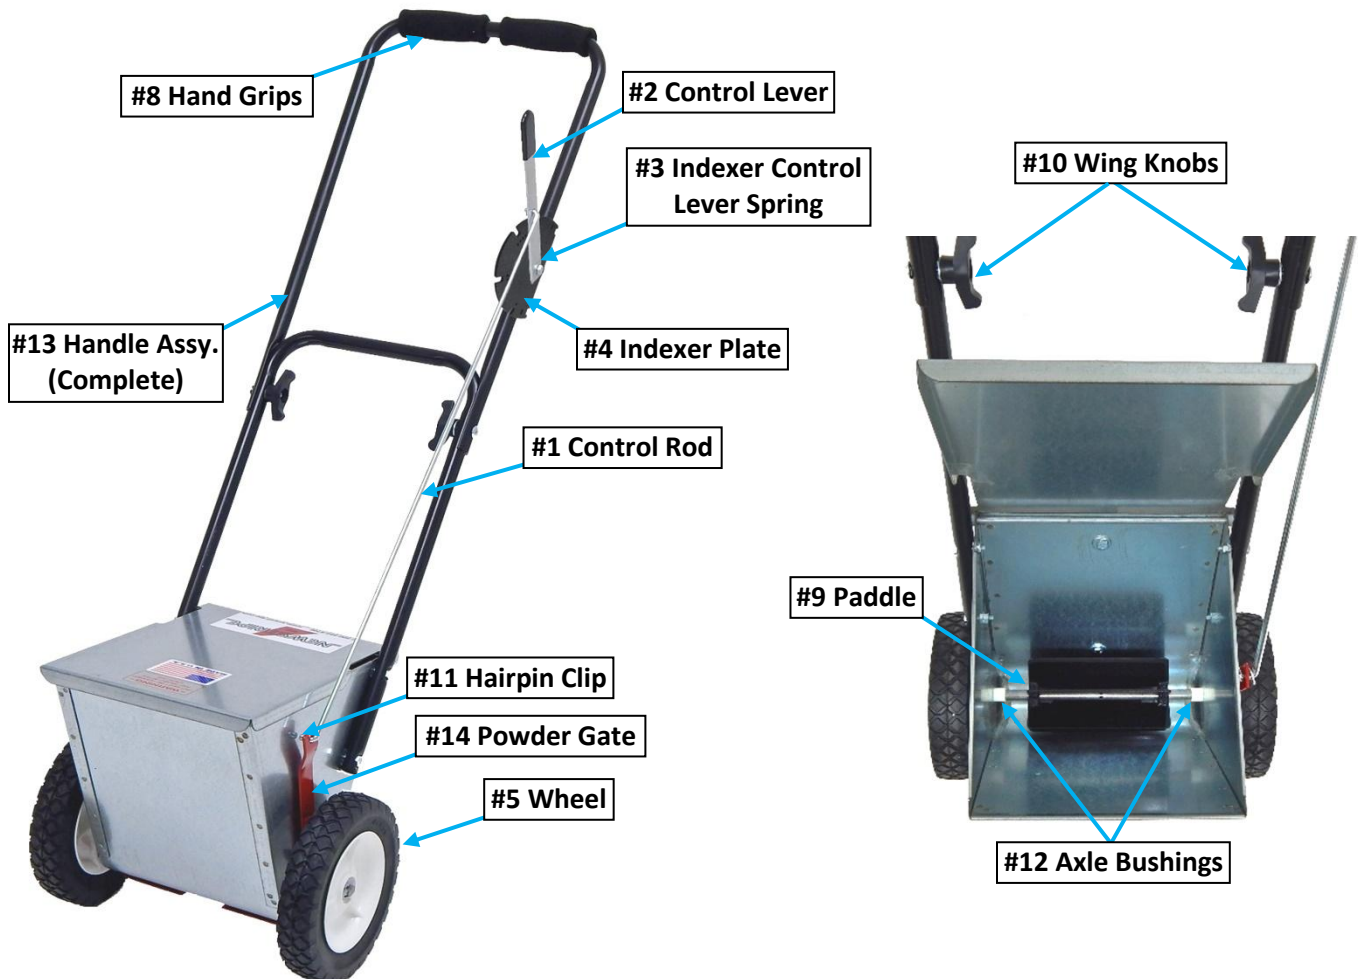

NewLiner™ 25lb Dry Line Marker

10001300

18 Month Warranty

Newstripe, Inc. ("Newstripe") warrants to the original purchaser, for 18 (Eighteen) Months after date of purchase, that the equipment* hereby sold shall be free of defects in materials and workmanship. This warranty does not extend to any damage or malfunction resulting in misuse, neglect, accident, improper operation, or normal wear and tear.

* Gasoline engines, compressors, low pressure pumps, and transaxles are furnished with their respective manufacturers' warranties only and are not covered by any warranty of Newstripe. High pressure pumps manufactured by Newstripe (excluding wear items like diaphragms and valves) are warranted for materials and workmanship for 12 Months after the date of purchase.

Damage incurred in shipment from Newstripe to the purchaser is the total responsibility of the shipping carrier. The purchaser is responsible for noting any damages on the Bill of Lading of the shipping carrier and Newstripe will work with the shipping carrier to resolve any damages incurred.

The Newstripe obligation under this warranty and any implied warranties is limited to replacement or repair of defective parts of its manufacture without charge for 18 (Eighteen) Months from date of purchase. For service under this warranty, the purchaser shall obtain an approved Return Materials Authorization (RMA) from Newstripe and then ship the defective part or parts of the equipment, transportation prepaid by the purchaser, to Newstripe together with a written description of any claimed defect and proof of purchase date of the materials being returned. To review Newstripe's complete guidelines for warranty claims and returns, please visit our website at www.newstripe.com.

The responsibilities described above are the only responsibilities of Newstripe under this written warranty or any implied warranty and may be exercised only within 18 (Eighteen) Months from the date of original purchase. In no event shall Newstripe be liable for incidental or consequential damages and no person has any authority to bind it to any representation or warranty. Newstripe is not responsible for work done, materials furnished, or repairs made by others without its specific written authorization.

This warranty shall be in lieu of any and all other warranties, expressed or implied, including any warranties of merchantability or fitness for a particular purpose, and there is no other representation or warranty of any kind with respect to the goods sold hereby except as set forth herein. It is expressly agreed that this warranty shall be limited to the adjustment, repair or replacement of parts and the labor and services required thereby. In no event, including any claim of negligence, shall Newstripe be liable for incidental or consequential damages.



Newstripe.com / 303-364-7786