


AeroVent® Standard & 1X Installation Guide

1

Install Unit on Drum


- Place pipe end (A) in large drum opening (rotate unit clockwise until it stops)
- Install lid handle (B) on lid with 2 screws

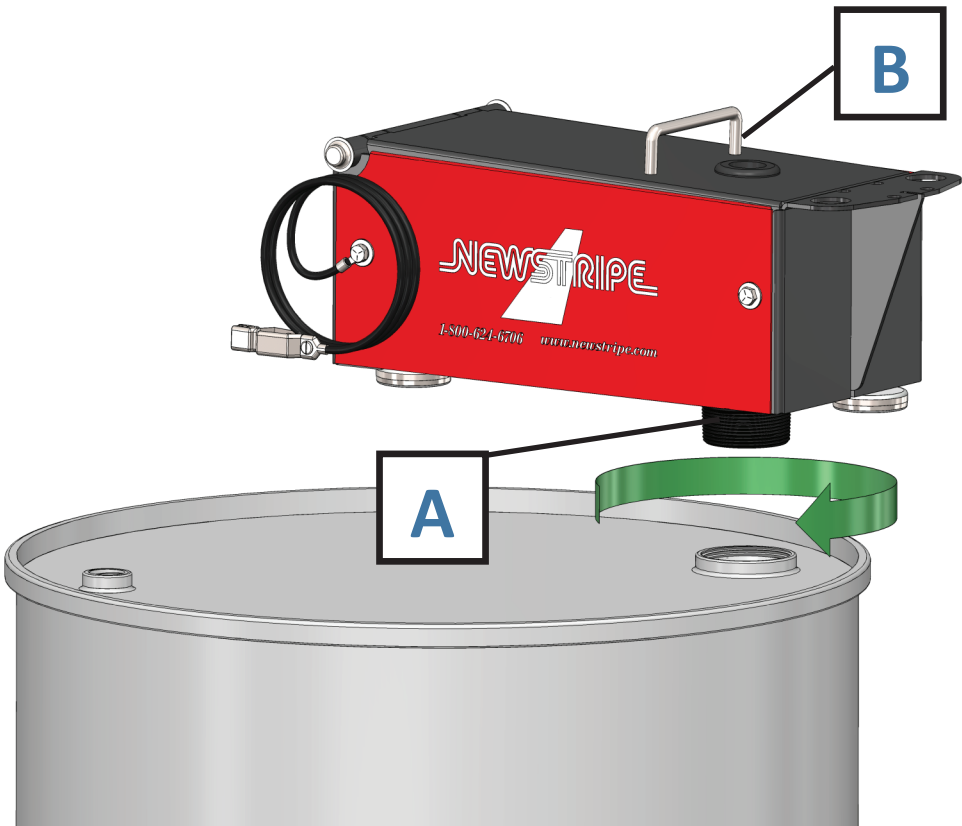

2

Assemble Parts & Secure Unit

- Lower rear foot (C) on top of drum, next to drum edge (turn unit as needed)
- Lower front foot (D) onto drum edge
- Install lid clamp (E) using 4 bolts, washers and nuts
- Insert can stop (F) into slot at front of tray

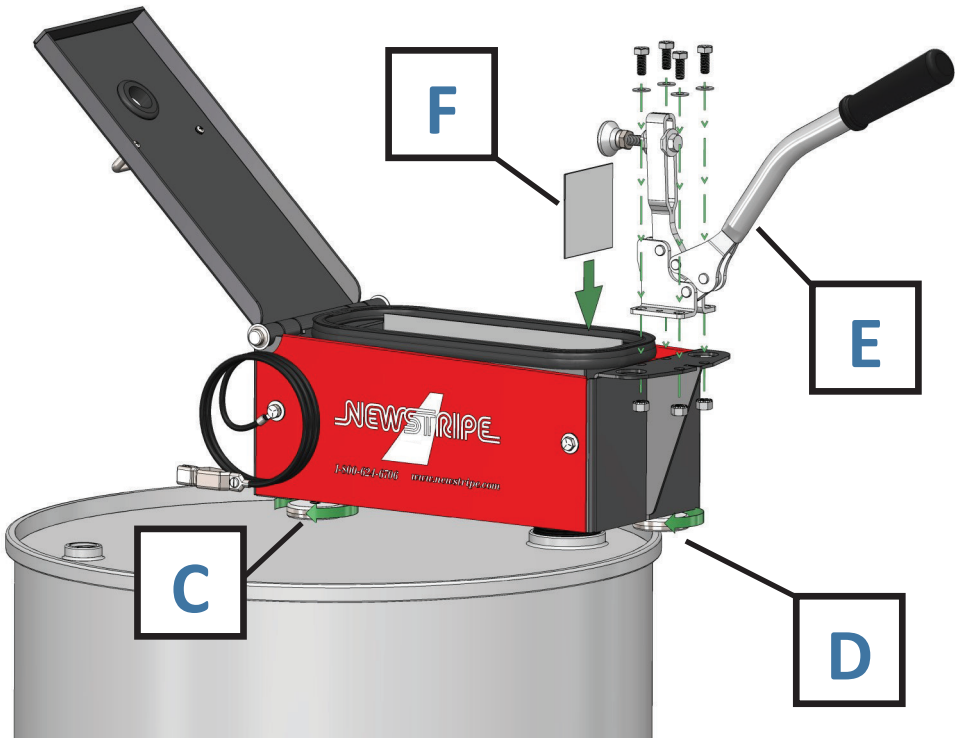

3

Install Filter Housing

- Install filter (G) in small drum opening
- Rotate clockwise until it stops


* For filter replacement:
AeroVent Safe2Vent Filter 2pk #10004703



4

Install Grounding Clamp & Cable

- Attach grounding clamp (H) to grounding source (example: metal water pipe)

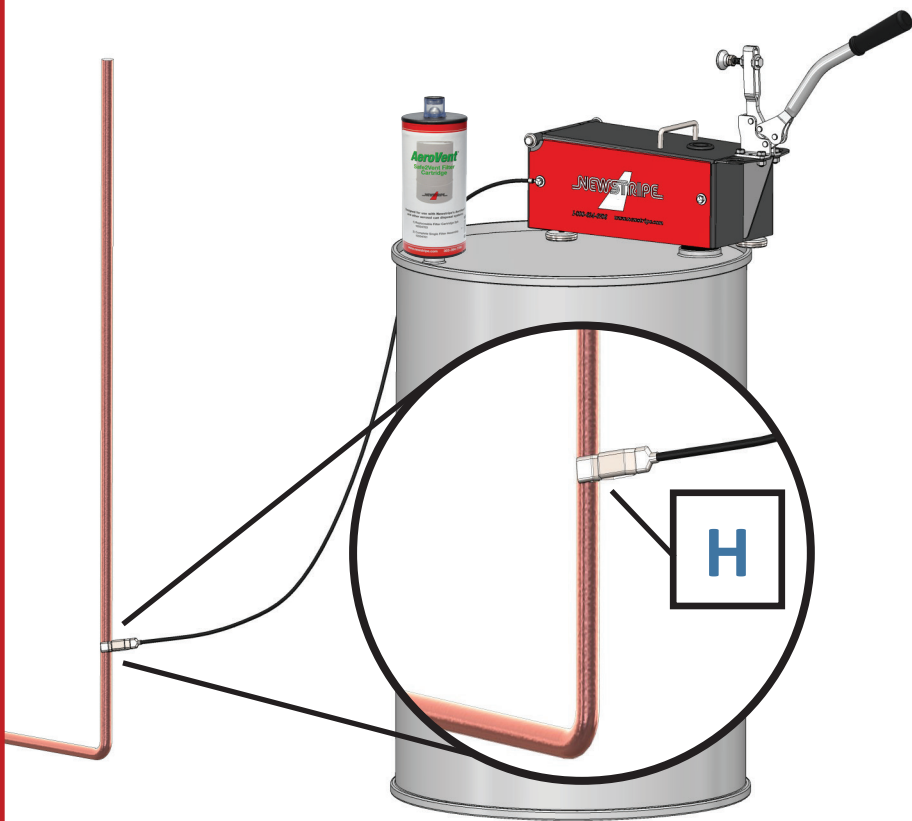

303-364-7786
www.newstripe.com

Over for Operation Guide




AeroVent® Standard & 1X Operation Guide

1

Measure Can Size

- Match bottom of can with circle on label
- Select plunger that matches can size: 2", 2.5", or 3"

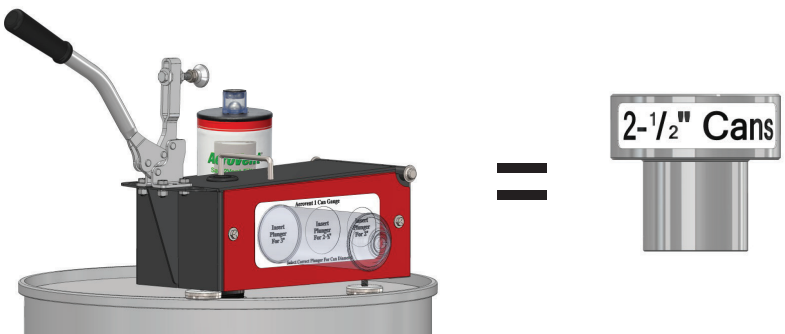

2

Install Plunger in Lid

- Lift operating lid
- Install plunger from step (1) into rubber grommet on lid



3

Insert Can(s) into Unit

- Lift lid
- Insert can with can bottom towards the operating handle against the can stop

⚠ NOT FOR USE WITH EXPANDING FOAM SEALANTS, SPRAY ADHESIVES OR INSECTICIDES



4

Puncture Can

- Close Lid
- Lower operating handle completely
- Wait 15 sec. for "empty" cans, 45 sec. for "full" cans. When Viz-a-Ball stops moving, machine is safe to open
- Lift operating handle, open lid and remove can(s)



303-364-7786
www.newstripe.com

Over for Installation Guide

