



## 25lb NewLiner Dry Line Markers Model 1300




Before assembling, please check the shipping carton. You should have:

- (1) Handle Assembly
- (1) Lever & Control Rod Assembly
- (1) Bucket Assembly
- (1) Kickstand
- (2) ¼"-20 x 1" Long Bolts
- (2) ¼"-20 x ½" Long Bolts
- (4) ¼"-20 Star Washer Lock Nuts
- (3) ¼" Flat Washers
- (1) 5/64" x 1-1/2" Hairpin Clip
- (1) ¼"-20 x 1-3/4" Long Fully Threaded Bolt
- (1) Notched Gate Indexer Plate
- (1) ¼"-20 Thin Jam Nut
- (1) Indexer Lever Spring
- (1) ¼"-20 Nylock Nut
- (2) 3/16" x 8" Black Zip Ties

### ASSEMBLY:

1. Loosen the wing knobs on the handle assembly and then unfold it. Re-tighten the wing knobs.
2. The handle assembly comes already attached to the top holes in the bucket. Rotate the handle assembly so that lower holes of the handle line up with the lower holes in the bucket. Attach the handle to the bucket lower holes with two ¼" x 1" long bolts and star washer lock nuts.
3. Attach the kickstand to the back of the NewLiner bucket with two ¼" x ½" long bolts, flat washers (on the outside) and star washer lock nuts.
4. Install the ¼"-20 x 1-3/4" fully threaded bolt in the lever pivot hole in the left side of the handle assembly from the inside out.
5. Install the indexer plate onto the fully threaded bolt, on the outside of the handle, and then secure it with one ¼" thin jam nut.
6. Secure each end of the indexer plate to the handle by placing a black zip tie through each slot and around the handle, and then pulling them tight. Trim the ends of each zip tie off.


7. Install the lever and control rod assembly onto the fully threaded bolt, followed by the indexer lever spring. Secure these parts with one ¼" Nylock nut. Tighten the nut only far enough to compress the spring to give the desired tension to keep the end of the rod in the notches of the indexer plate.  
(See the diagram below for steps 4 thru7)

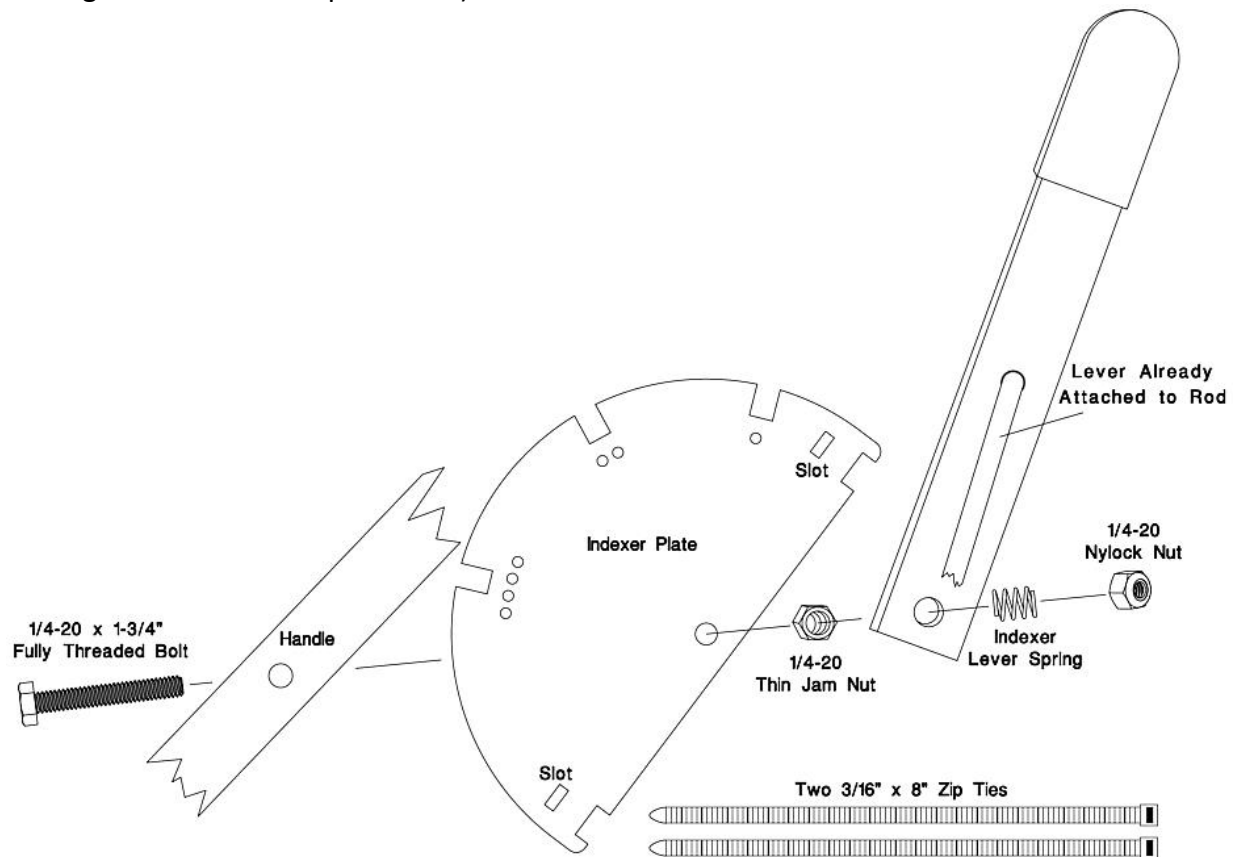

8. Place one ¼" flat washer on the bottom end of the rod and then insert the rod end in the hole of the powder gate arm. Secure the rod to the powder gate arm with the hairpin clip. (The lever should be above the handle as shown.)
9. You are now ready to begin making lines.

### OPERATION:

1. Move the powder gate lever to the OFF position (Single hole indicator in indexer plate).
2. Fill the NewLiner with any type of dry line marking material.  
**NOTE: Make sure the material is kept dry.**
3. Position the NewLiner over the line to be marked.
4. Select the line width by moving the powder gate lever to either the 2" position (Two holes indicator in indexer plate), or the 4" position (Four holes indicator in indexer plate).
5. Begin walking. The material will feed from the bottom of the bucket as you walk until the bucket is empty or the lever is moved to the OFF position.
6. Rinse the bucket after each use and then allow it to air dry.

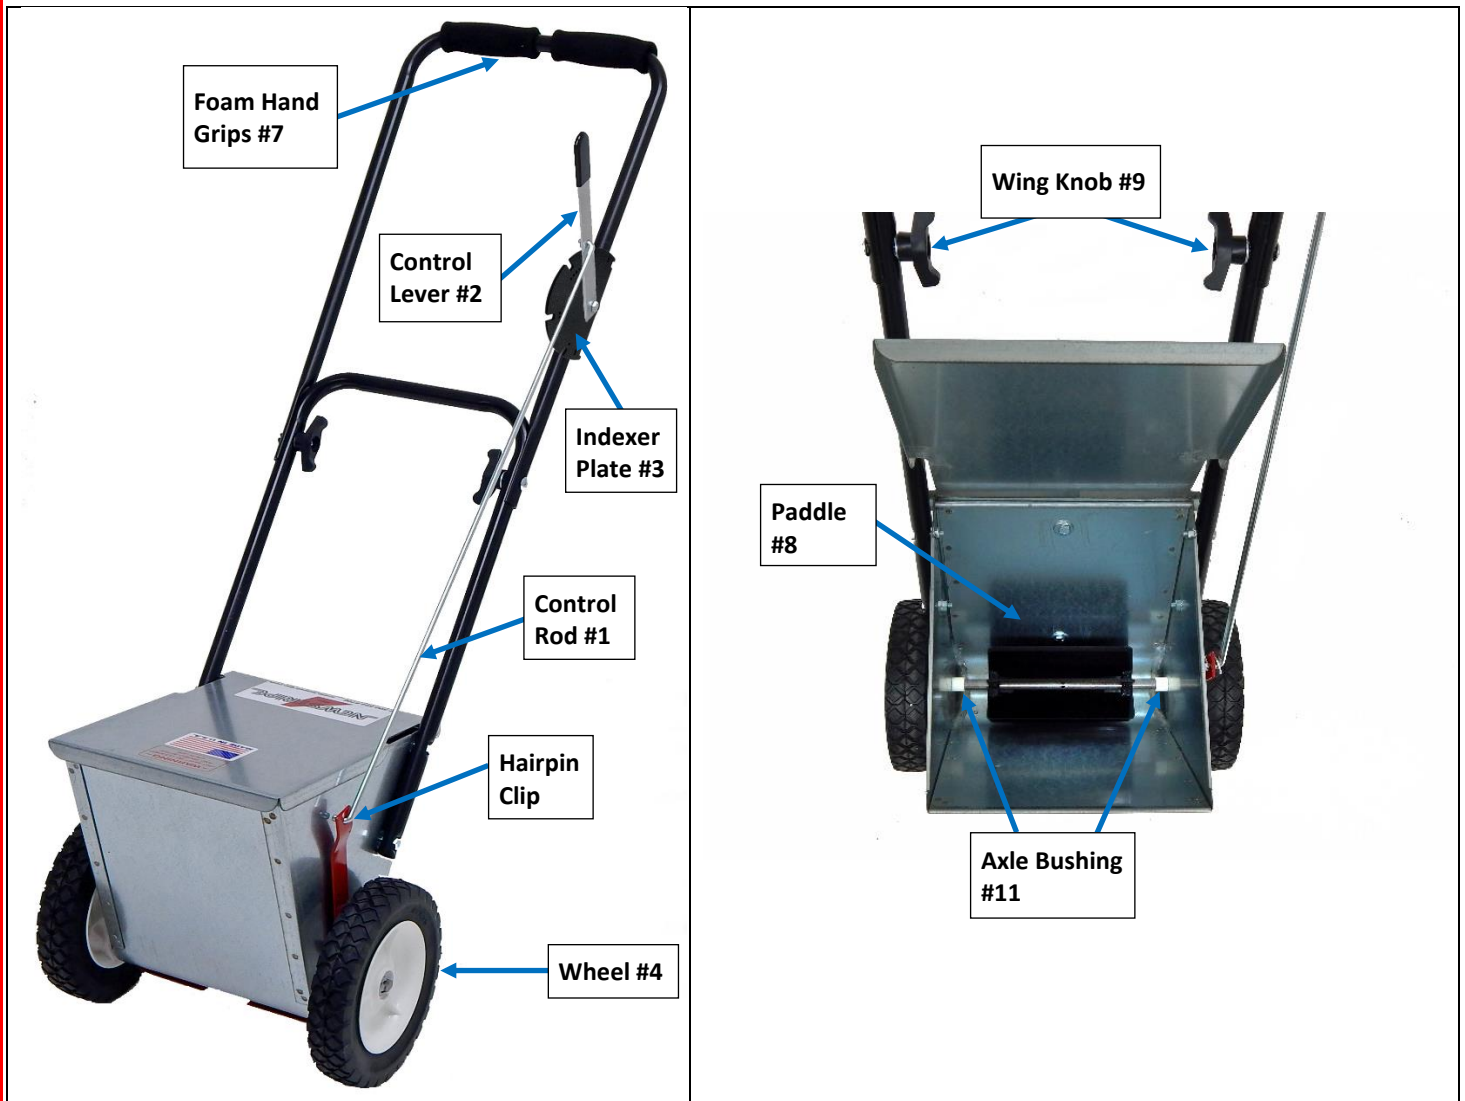

### PARTS LIST:

<u>Item#</u>	<u>Description</u>	<u>Part #</u>
1	Control Rod	10001479
2	Control Lever	10001478
3	Indexer Plate (With 2 Zip Ties)	10000763
4	Wheel (2 Required)	10001329
5	Drive Hub (Not Shown)	10000520
6	½" Push Nut (Retains Wheel)	10001457
7	Foam Hand Grip (2 Required)	10000967
8	Paddle	10001481
9	Wing Knob (2 Required)	10004899
10	Hairpin Clip	10002492
11	Axle Bushing	10001311

## THE NEWSTRIPE 18 MONTH LIMITED WARRANTY

NEWSTRIPE, INC., WARRANTS TO THE ORIGINAL PURCHASER, FOR 18 (EIGHTEEN) MONTHS AFTER DATE OF PURCHASE, THAT THE EQUIPMENT\* HEREBY SOLD SHALL BE FREE OF DEFECTS IN MATERIALS AND WORKMANSHIP. THIS WARRANTY DOES NOT EXTEND TO ANY DAMAGE OR MALFUNCTION RESULTING FROM MISUSE, NEGLIGENCE, ACCIDENT, IMPROPER OPERATION, OR NORMAL WEAR AND TEAR.

Damage incurred in shipment from Newstripe, Inc. to the customer is the total responsibility of the carrier. The CUSTOMER MUST NOTE DAMAGES on the Bill of Lading of Trucking Company or Railroad; and Newstripe, Inc. will furnish to the customer the cost or parts and labor. The customer can then bill the common carrier for the damages by placing his signature on the documents.

The Newstripe, Inc. obligation under this warranty and any implied warranties is limited to replacement or repair of defective parts of its manufacture without charge for 18 (Eighteen) months from date of purchase. For service under this warranty, buyer shall ship the defective part or parts of the equipment, transportation prepaid, to Newstripe, Inc. together with a written description of any claimed defect and proof of purchase date of the materials being returned. **Prior to retuning any part or machine, the CUSTOMER must obtain a Return Materials Authorization number. Call 1-800-624-6706. To review the complete guidelines for warranty and returns, please visit [www.newstripe.com/guidelinesforwarrantyandreturn](http://www.newstripe.com/guidelinesforwarrantyandreturn).**

**\*Gasoline engines, compressors, pumps (including airless) and Transaxles are furnished with their respective manufacturer's warranties only. Such components are not covered by any warranty of Newstripe, Inc. Where Newstripe elects to extend manufacturers' warranties, the warranty shall be pro-rated as to cover 100% of the cost to replace or repair materials and parts for the first 12 months of ownership and 60% for the remaining 6 month period.**

The responsibilities described above are the only responsibilities of Newstripe, Inc. under this written warranty or any implied warranty, and may be exercised only within 18 (Eighteen) months from the date of purchase. In no event shall Newstripe, Inc. be liable for incidental or consequential damages and no person had any authority to bind it to any representation or warranty, not be responsible for work done, materials furnished or repairs made by others without its' specific written authorization.

THIS WARRANTY SHALL BE IN LIEU OF ANY AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND THERE IS NO OTHER REPRESENTATION OR WARRANTY OF ANY KIND WITH RESPECT TO THE GOODS SOLD HEREBY EXCEPT AS SET FORTH HEREIN. IT IS EXPRESSLY AGREED THAT THIS WARRANTY SHALL BE LIMITED TO THE ADJUSTMENT, REPAIR OR REPLACEMENT OF PARTS AND THE LABOR AND SERVICES REQUIRED THEREBY. IN NO EVENT, INCLUDING ANY CLAIM FOR NEGLIGENCE, SHALL NEWSTRIPE, INC. BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Sincerely,  
Newstripe, Inc